



外曲肘注塑機

Outward Toggle Injection Molding Machine

SA SERIES

SA Series



高效率 - 生產效率提升15~20%

高性能 - 射出速度提升20%以上

High Efficiency - Increasing production efficiency 15~20%.

High Performance - Improving injection speed by 20% ↑.



FCS五十年技術結晶與積累，創造了多樣性的產品及穩定的性能品質，同時也針對各行業不同產品特性，提供差異化技術整合與服務。**SA系列**為FCS全新發表之外曲肘注塑機，不僅規格升級，設計也更加優化，外觀造型仍堅持美學與人因工程兼備之要求，更整合高階電控系統優勢，可充分結合FCS工業4.0解決方案，是一款集性能、效能與智能於一體的智能化注塑成型機，可廣泛應用於家用民生、文具、汽車、3C等產業，鞏固客戶競爭優勢。

With 50 years of technological developments and innovations, FCS offers a new and optimized design with increased performance and reliability for a wide variety of industries.

The new **SA Series** delivers unmatched efficiency with its Outward toggle system. The clamp and injection unit specifications have also been increased to allow our customers more flexibility in the range of molds they can run in the machine. The outside appearance of the machine was developed with friendly ergonomics to make working in and around the machine easy, comfortable and safe for the operator. The KEBA control now offers an enhanced capability to integrate the FCS iMF 4.0 system to assist in making your facility a Smart Injection Molding Machine Plant. Overall, these new enhancements to the SA Series will help our customers increase their competitiveness in the industry and propel them to the next stage in new machine technology.



精密光學
Optical Element

展合優翼 風生水起

長度縮短
15-20%

Reduce the length
by 15-20%

相比傳統同噸位機型
Compared to traditional IMM
of the same-tonnage



Thriving and Flexible

家用五金製品
Housewares

厚件容器
Thick-Wall



電子產品外殼
Electronic
Product Casings



家電用品
Home Appliances




汽車部件
Automotive Parts



精準的注塑單元 Accurate Injection Unit

高混練螺桿
High mixing screw




高混練螺桿 (選配)

提升L/D比，滿足高射量產品。
(250 ton以上機型增加D螺桿)

High Mixing Screw (Optional)

Improve L/D ratio and meet high injection volume products (and add D-screw choice for models above 250 ton).

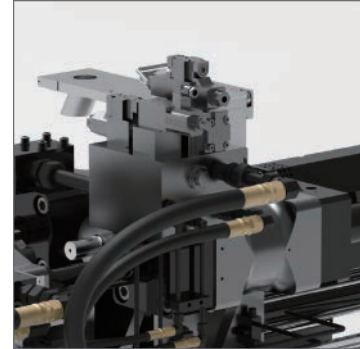


電動儲料(選配)

- 儲料電動化實現精準加料控制。
- 滿足開模加料同步動作，適用短周期需求。
- 可依螺桿扭力需求選用直驅型或齒輪箱型儲料馬達。

Electric Plasticizing System (Optional)

- Electrified plasticizing mechanism delivers precise material feed control.
- Supports simultaneous plasticizing during mold opening, ideal for short-cycle molding applications.
- Direct-drive and gearbox motor options available based on screw torque requirements.

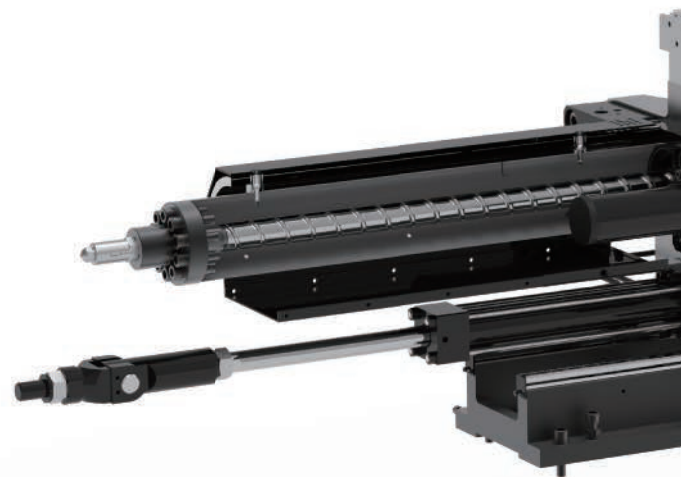

射座線性滑軌

- 負荷輕、減少磨耗，注塑控制精準穩定。
- 儲料背壓阻力低，減少熔膠溢流改善70%。

Linear Guide For The Injection Carriage


- Lighter load and less abrasion which ensures precise and stable injection.
- Basic charging back pressure to reduce the melt overflow improve 70%.

優化的油壓迴路


- 注塑油路板與油缸整合優化，系統壓力提升，提升注塑響應。
- 油箱循環優化，提升液壓油效率，延長油品使用壽命。

Optimized Hydraulic Circuit

- Integration of the injection manifold and cylinder enhances system pressure and improves injection responsiveness.
- Upgraded hydraulic tank circulation increases oil utilization efficiency and prolongs hydraulic oil service life.

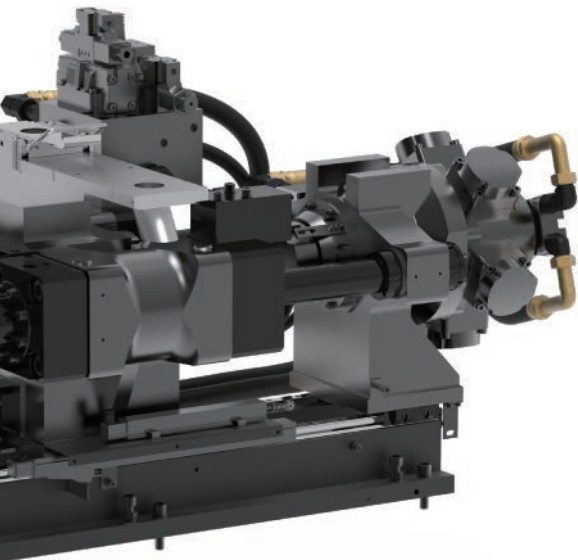

全閉迴路系統 Closed-loop system

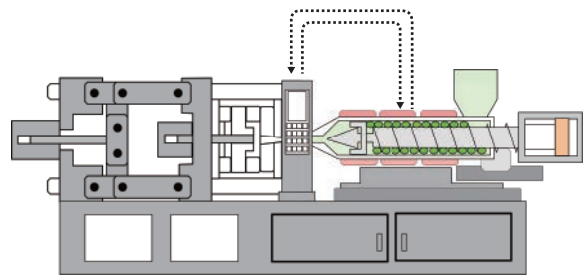

回授螺桿位置於控制器
Screw position feedback to the controller.

伺服動力全閉迴路

精準控制每模射速，注塑時間穩定性 >99.9%，成型品重量穩定性佳。

Servo power closed-loop system

Accurately controls the injection speed, injection time and shot weight.

射座前拉設計

形成力量閉循環，減少機架受力，使射出推力更集中。

Injection Carriage With Front Pulling Cylinder

Closed loop design minimizes frame load and concentrates injection thrust for enhanced performance.

模組化規格選型

提供高速款規格，彈性化滿足食品包裝、薄壁容器等產業需求。

Optional Modular Specification

High-speed option is available for food packaging industry and thin-walled product molding requirements.

優化的夾模單元 Optimized Clamping Unit

機台高效緊湊

- 機身總長縮短17%，減少占地空間，提升廠房利用率。
- 機台高度符合人體工學設計，操作更舒適。

High-Efficiency, Compact Machine Layout



- Overall machine length reduced by 17%, minimizing footprint and optimizing plant space utilization.
- Ergonomic machine height design improves operator comfort and accessibility.

模具動作配合優化

- 中子可設定多組動作順序並支援反向運行，靈活配合各式模具需求。
- 具強制頂針退回功能，滿足模具特殊需求。（選配）

Enhanced Mold Action Synchronization

- Supports multiple core action sequences with optional reverse operation capability.
- Equipped with Ejection-pullback function to accommodate specialized mold requirements. (Optional)

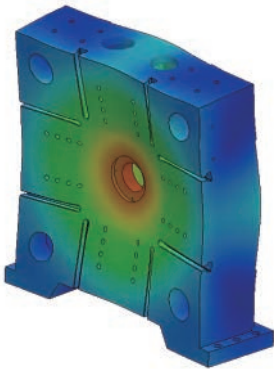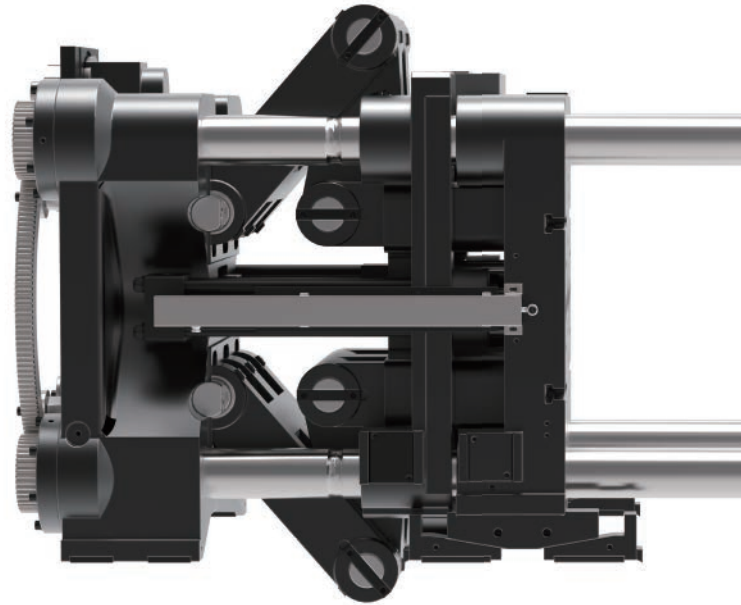

模盤強度提升


- 剛性提升30%，模盤變形量更低，提升模具使用壽命。
- 成品重量有效縮減3%。
- 成品重量穩定度提升40%。

Platen Strength Improvement

- Increase rigidity by 30%, lower deflection of mold plate, and improve the mold lifetime.
- Finished product weight reduced by 3%.
- Weight stability improved by 40%.



總容模空間全方位增加23%

- 開模行程增加18%，搭配柱內距加大及寬模板設計，全方位增加容模空間。
- 全系列標配T型槽，提高模具使用彈性。

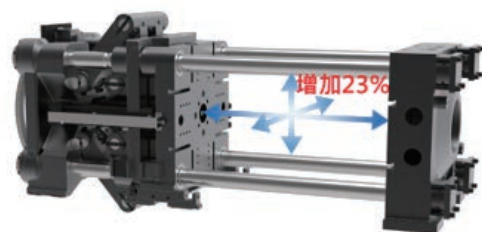


Expanded Mold Accommodation Capacity

- Mold opening stroke increased by 18%, with larger tie bar spacing and wider platen design, achieving a 23% overall increase in mold space.
- Standard T-slot platens across all models enhance mold installation flexibility.

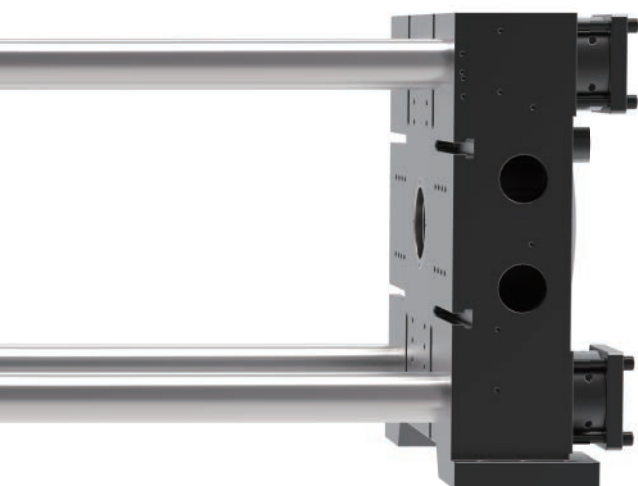

SA Series



HN Series

柱內距加大
模具應用彈性高。

Tie Bar Spacing Increase

More flexible choices for mold application.


活動壁設計優化

- 中心鎖模結構，力流均勻化，可減少模具變形。
- 剛性提升30%，模盤變形量更低，生產穩定性提升40%。
- 夾模雙缸設計，位置同步性>99.95%


Optimized Moving Platen Design

- Centralized clamping structure ensures uniform force distribution, effectively reducing mold deformation.
- Rigidity improved by 30%, resulting in lower platen deflection and a 40% improvement in production stability.
- Dual-cylinder clamping system achieves synchronization accuracy exceeding 99.95%.

HN Series



SA Series



智能的電控單元 Intelligent Control Unit

直覺式操作介面

- 全新設計畫面風格與圖示，12" TFT真彩色顯示螢幕，操作更為便利。
- 具多階密碼保護功能，記錄與限制各階使用者參數修改。
- 提供統計製程控制及射出波形圖，提高生產品質與效率。
- USB資料存取介面，模具參數、顯示畫面存取便利。
- 支持常用通訊介面RS-485、USB、CAN、Ethernet、EtherCAT、遠端介面顯示VNC、OPCUA(選配)、Euromap77（選配）。
- 開合模5段控制，射出9段/保壓5段控制、熔膠/背壓5段控制、頂出3段控制。
- 模具參數500組，警報記錄每個等級512條。
- 多種語言可供客戶選擇。

Intuitive HMI

- 12" TFT full-color display with redesigned UI and intuitive icons for enhanced operability.
- The multi-level password protection function is used to record and limit the parameters modification from various levels of users.
- Provide statistical process control and injection waveformsto improve production quality and efficiency.
- Convenient access to USB data, mold parameters and display screens.
- Supports RS-485, USB, CAN, Ethernet, EtherCAT; Remote interface display VNC, optional OPCUA (Optional) and Euromap 77(Optional).
- Multi-stage control:
 - Clamping: 5 stages - Injection: 9 stages / Holding: 5 stages
 - Ejection: 3 stages - Plasticizing / Back pressure: 5 stages
- 500 mold data sets; 512 alarm logs per level.
- Multiple languages are available for users.

控制精度

- 加熱控制精度0.1°C並有效分段控制，以提升塑化能力。
- 位置控制精度0.1mm，可準確控制動作行程。


Control Precision

- Barrel heat zones are accurate to 0.1 degree C to ensure stable material plasticizing.
- Screw position is controlled with in 0.1mm to precisely control shot size and cushion position.



iMF 4.0 智能製造工廠

intelligent ManuFactory

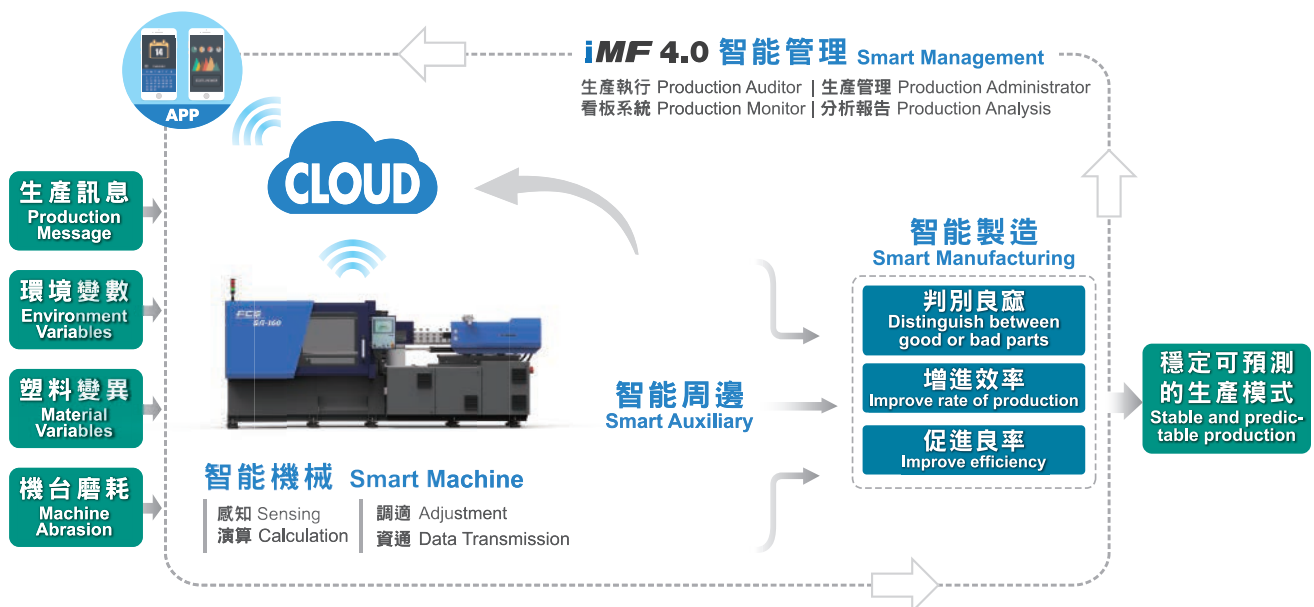

遠端監控&工業4.0 (選配)

- 生產品質記錄。
- 模具資料上傳及下載。
- 機台稼動率及產能統計。
- 機台停機狀態顯示及記錄。
- 可將資訊匯出以進行看板管理。

Remote Control & Industry 4.0 (Optional)

- Production quality recording.
- Mold information upload and download.
- Machine utilization rate and production capacity statistics.
- Machine downtime status display and recording.
- Information can be exported for visual management.

智慧功能模組 (選配)

- 大柱鎖模力回饋控制。
- 各別大柱鎖模力及總鎖模力SPC顯示，達到數據可視化及不平均監視。
- 鎖模力免停機自動校正調控，隨時保持最佳鎖模狀態。

Smart Functional Modules (Optional)

- Tie-bar clamping force feedback control.
- Real-time SPC display for individual tie-bars and total clamping force, enabling data visualization and unevenness monitoring.
- Automatic clamping force recalibration without downtime to maintain optimal molding conditions at all times.

即時能耗紀錄與碳排履歷計算 (選配)

- 即時能耗紀錄，隨時掌握機台生產效率。
- 計算產品碳排履歷，協助可視化數據管理。


Real-Time Energy Consumption And Carbon Footprint Monitoring (Optional)

- Continuous recording of energy usage facilitates real-time production efficiency tracking.
- Integrated carbon footprint calculation supports data visualization and sustainable production management.


控制器 Control	FCS 6510S (SA-100-SA-400)	FCS 6500S (SA-470-SA-1250)
螢幕尺寸 Screen Size	12"	12"
操作方式 Operation Method	按鍵 Button	按鍵 Button
反應時間 Reaction Time	≤1ms	≤1ms
螢幕顯示 Screen Display	• 800x600像素 • 160萬色真彩顯示 • 800x600 pixel • 16 million color palettes	

外觀尺寸圖 Machine Dimension

SA-100

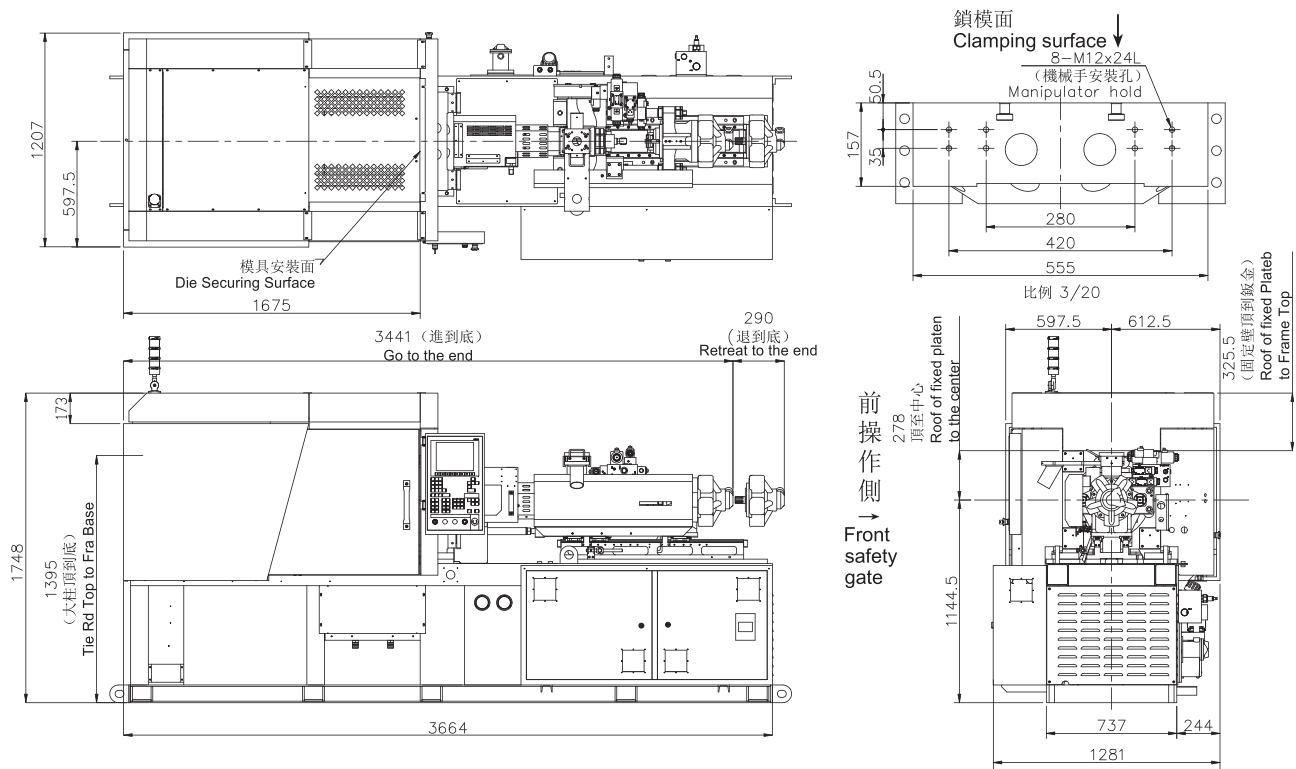


SA-125

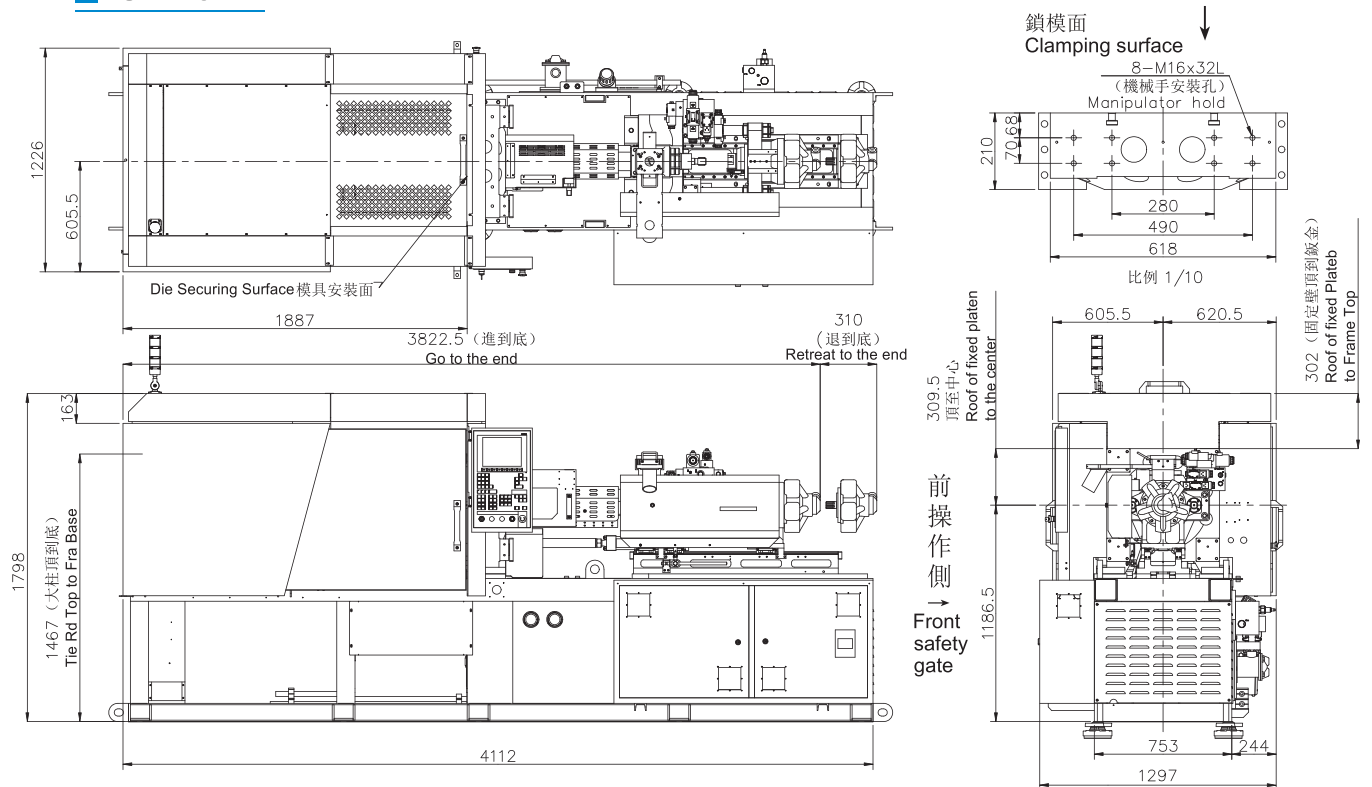


外觀尺寸圖 Machine Dimension


SA-160

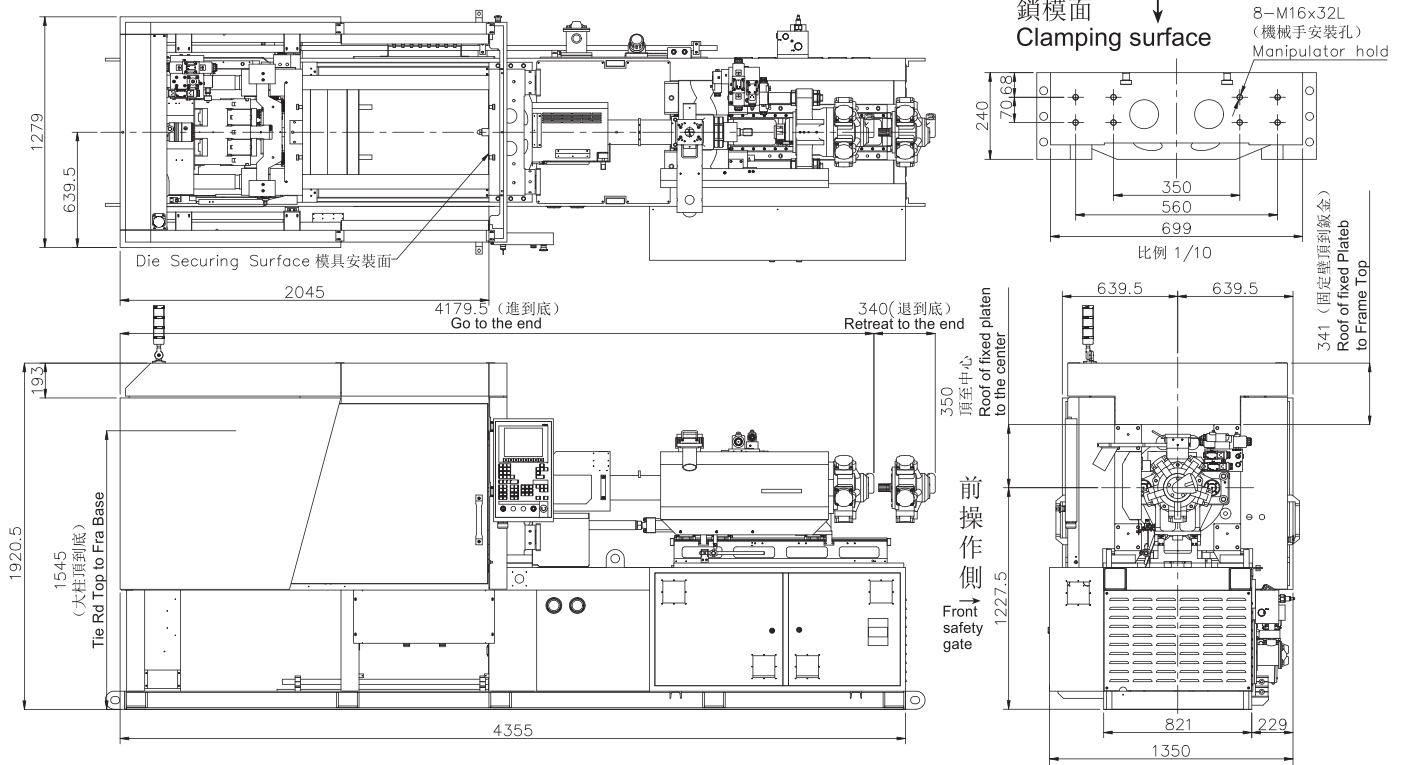


SA-200

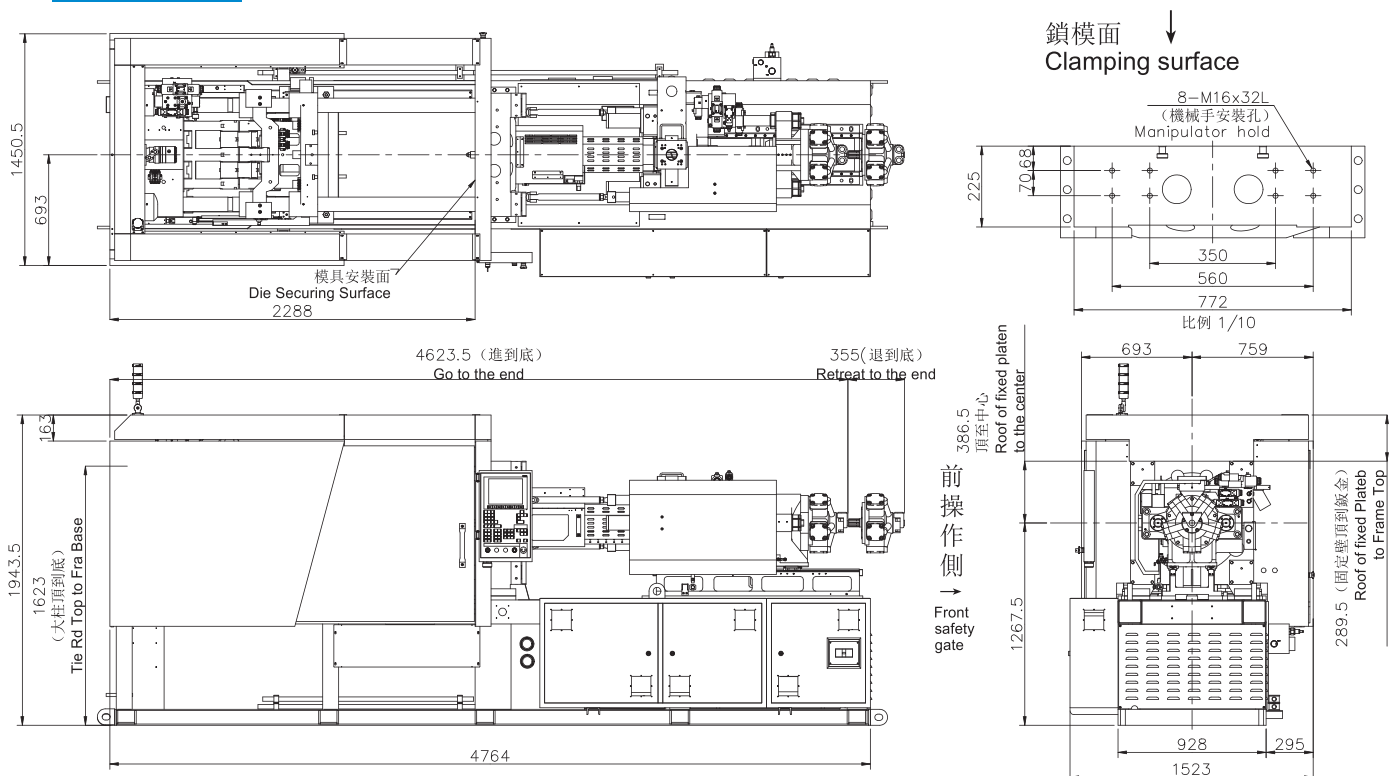

SA-250

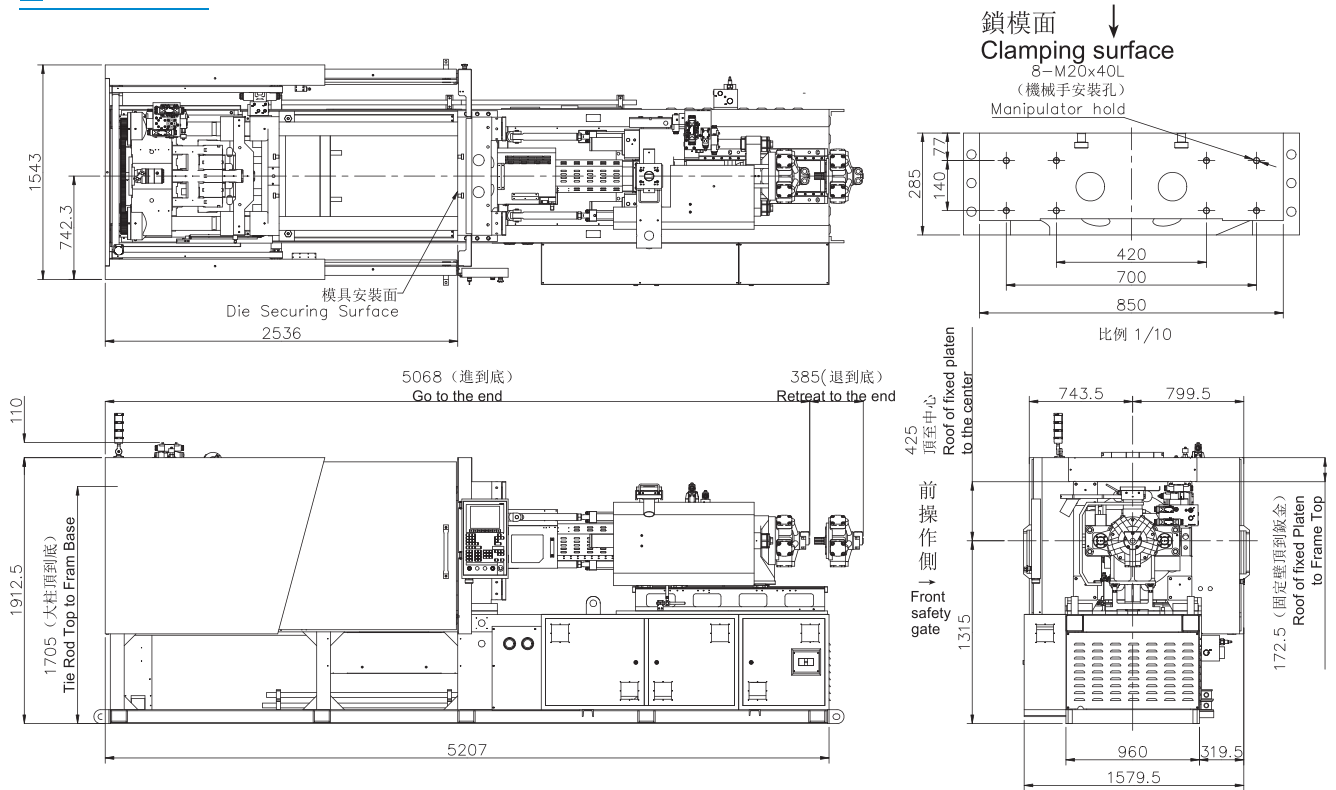


SA-300

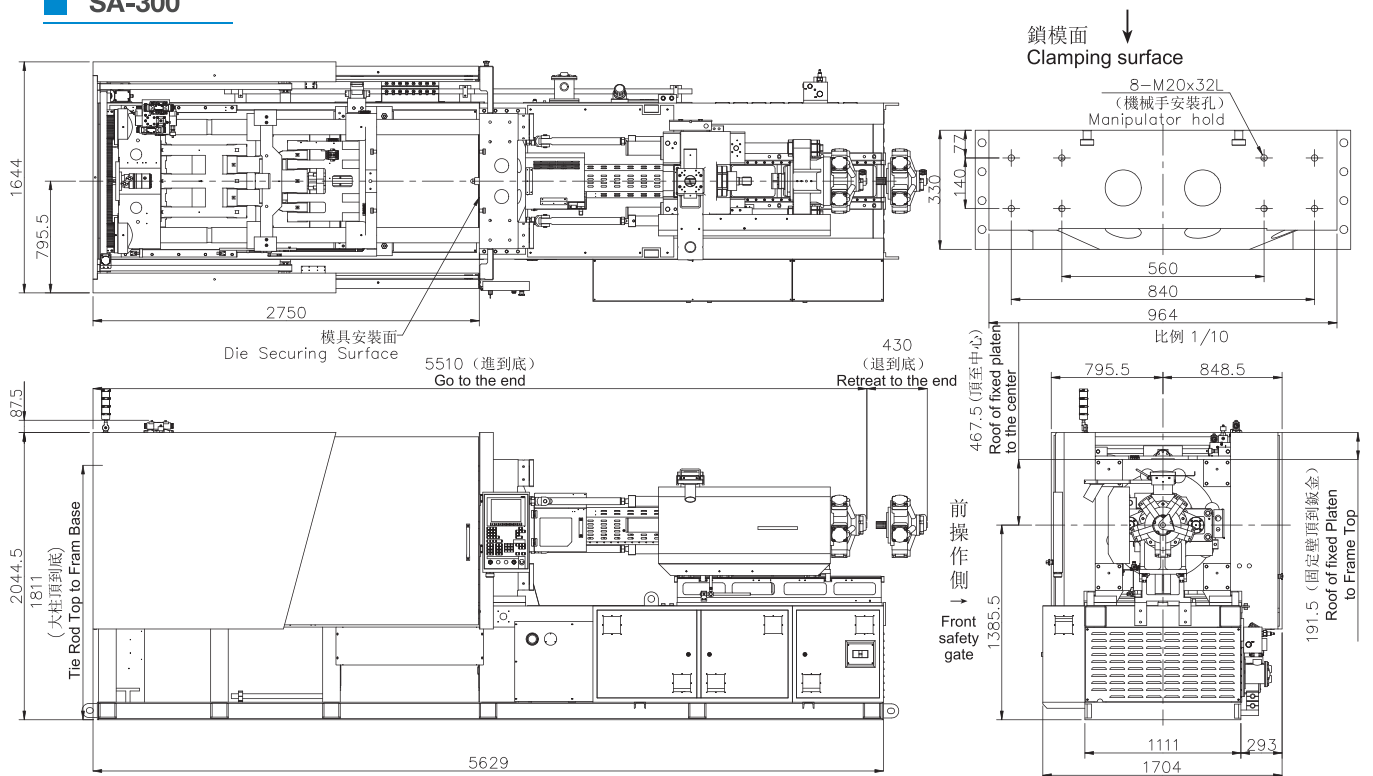


外觀尺寸圖 Machine Dimension


SA-350

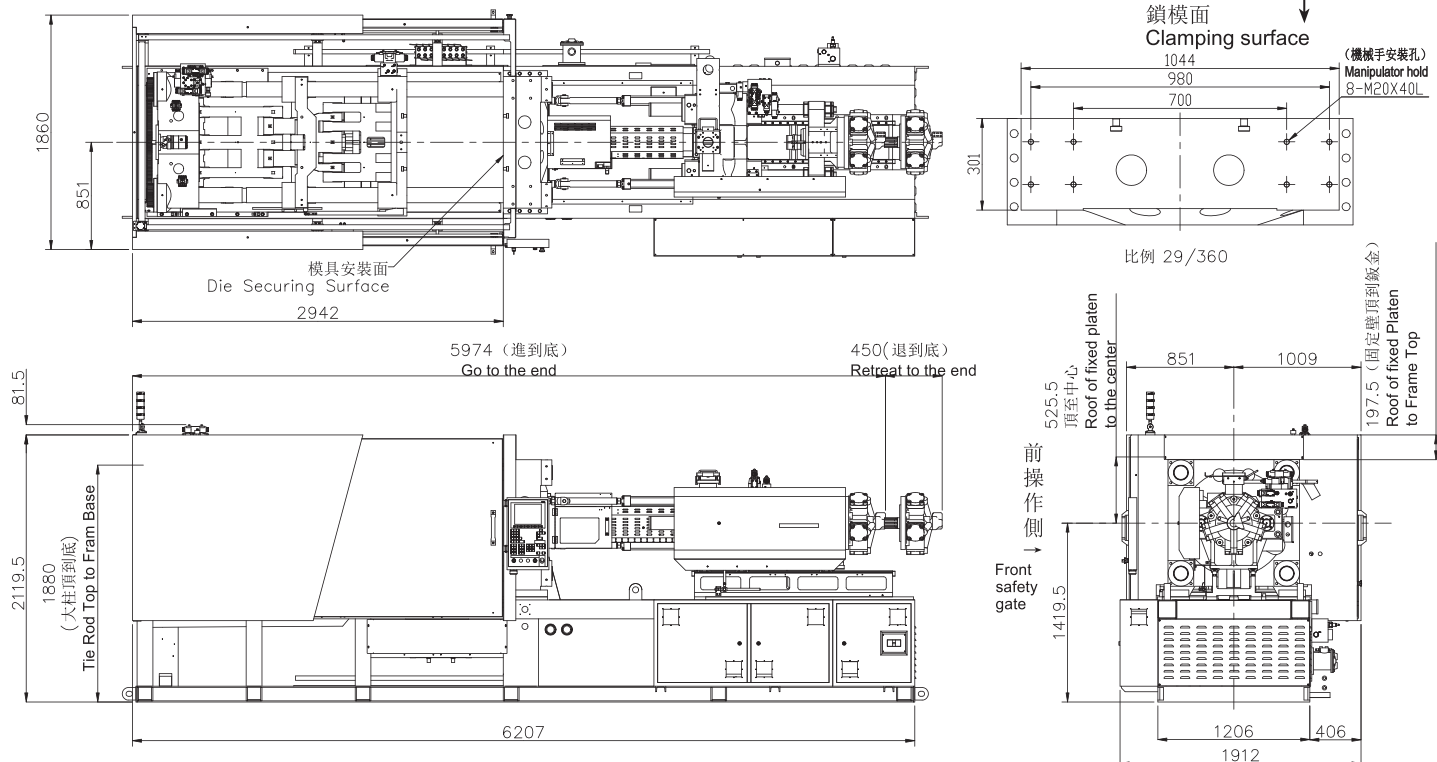


SA-400

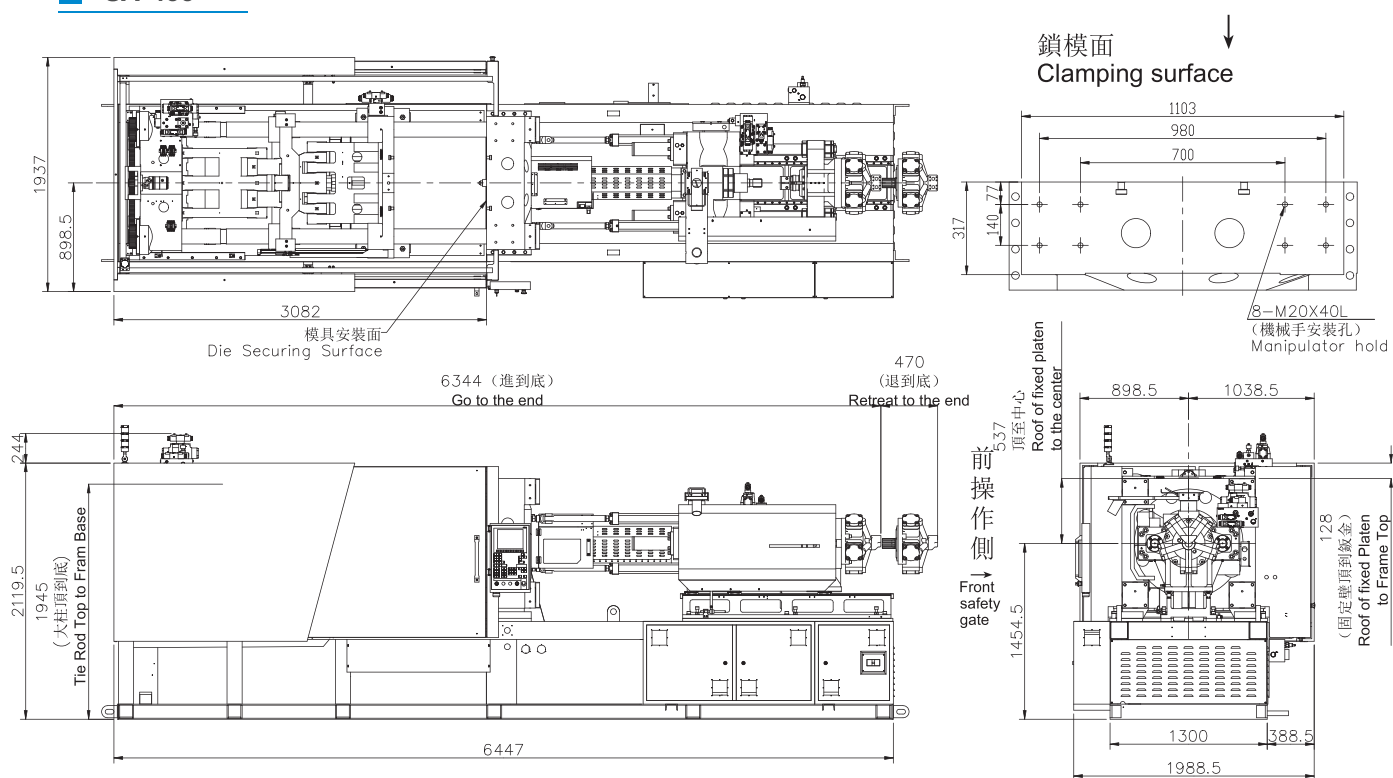

SA-470

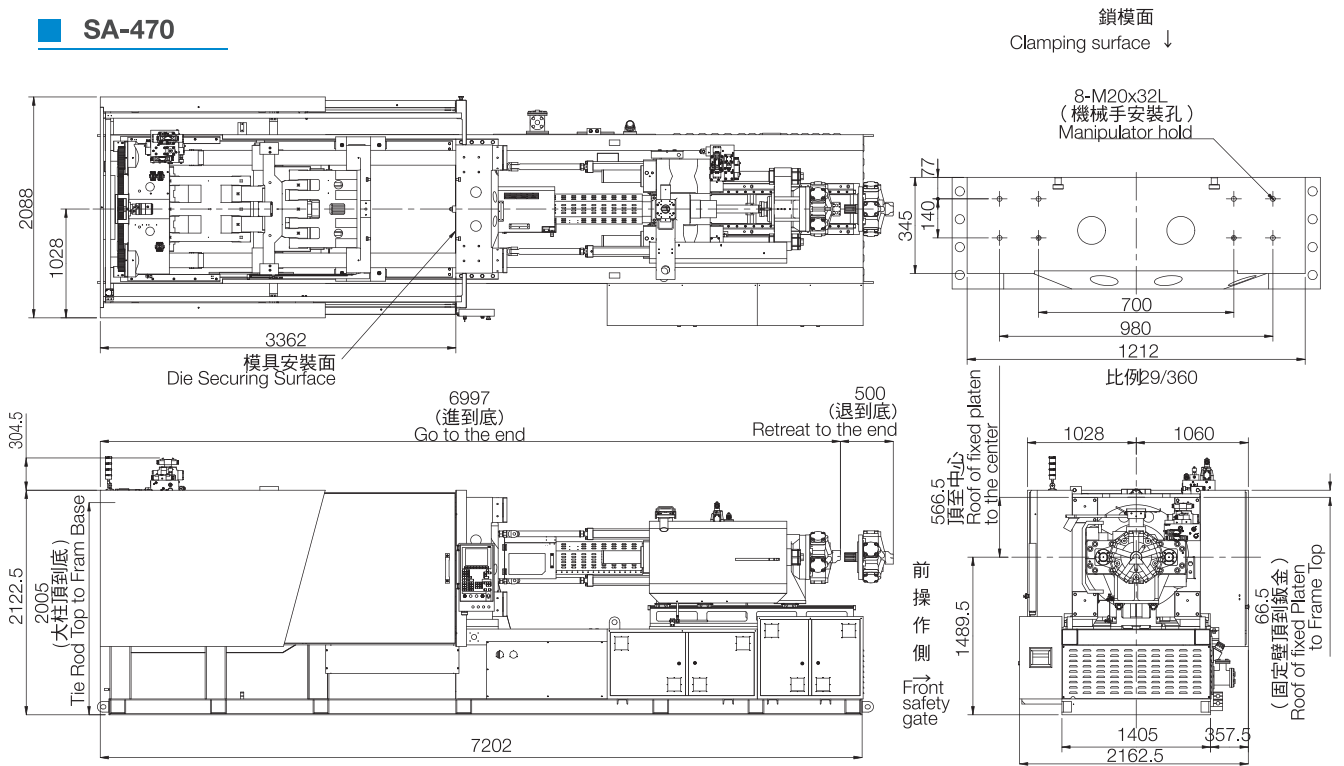


SA-530

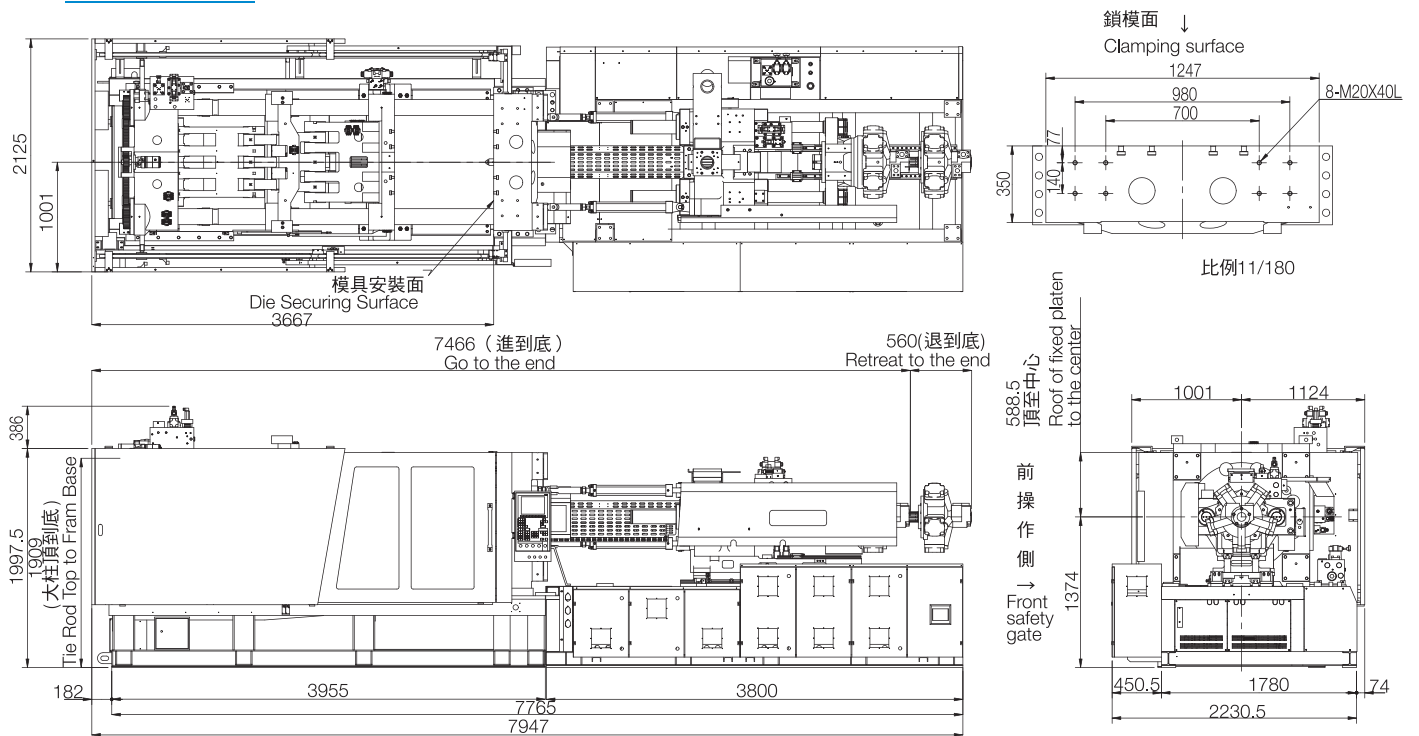


外觀尺寸圖 Machine Dimension


SA-600

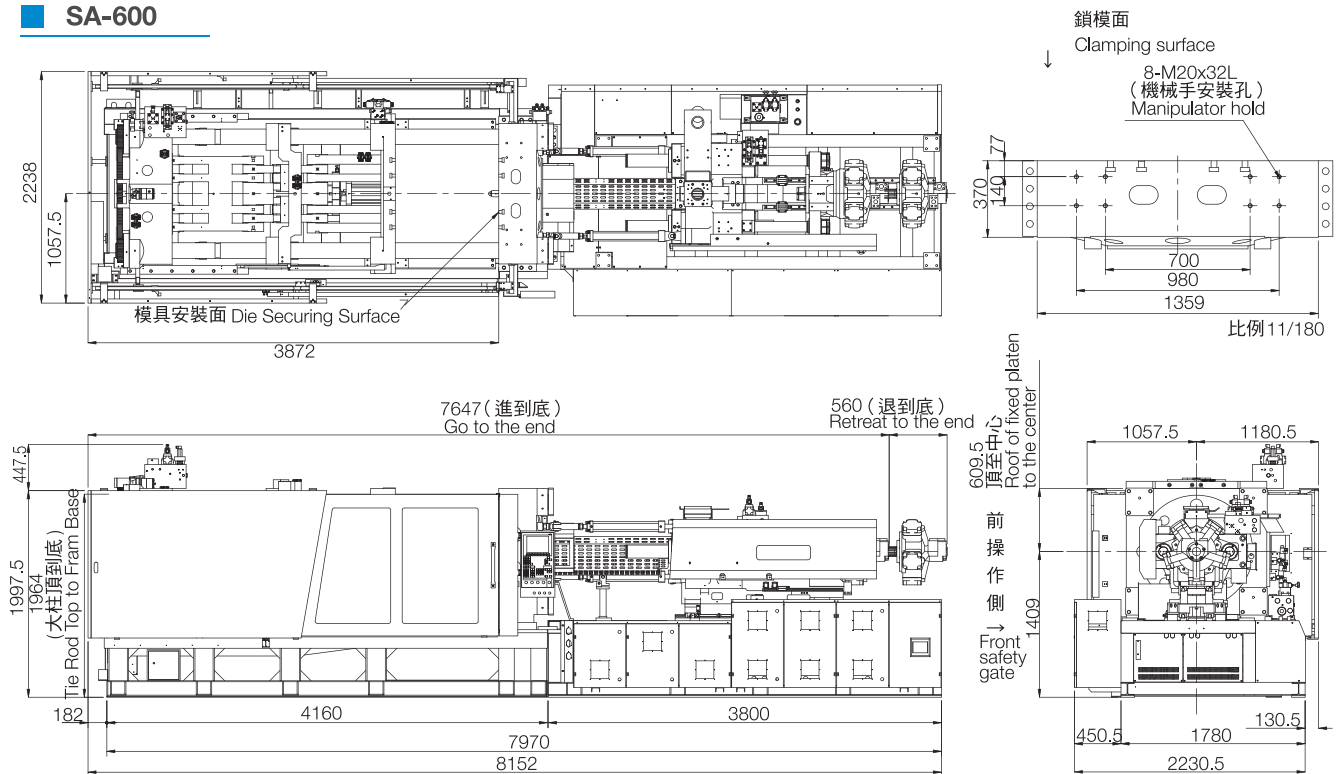


SA-750

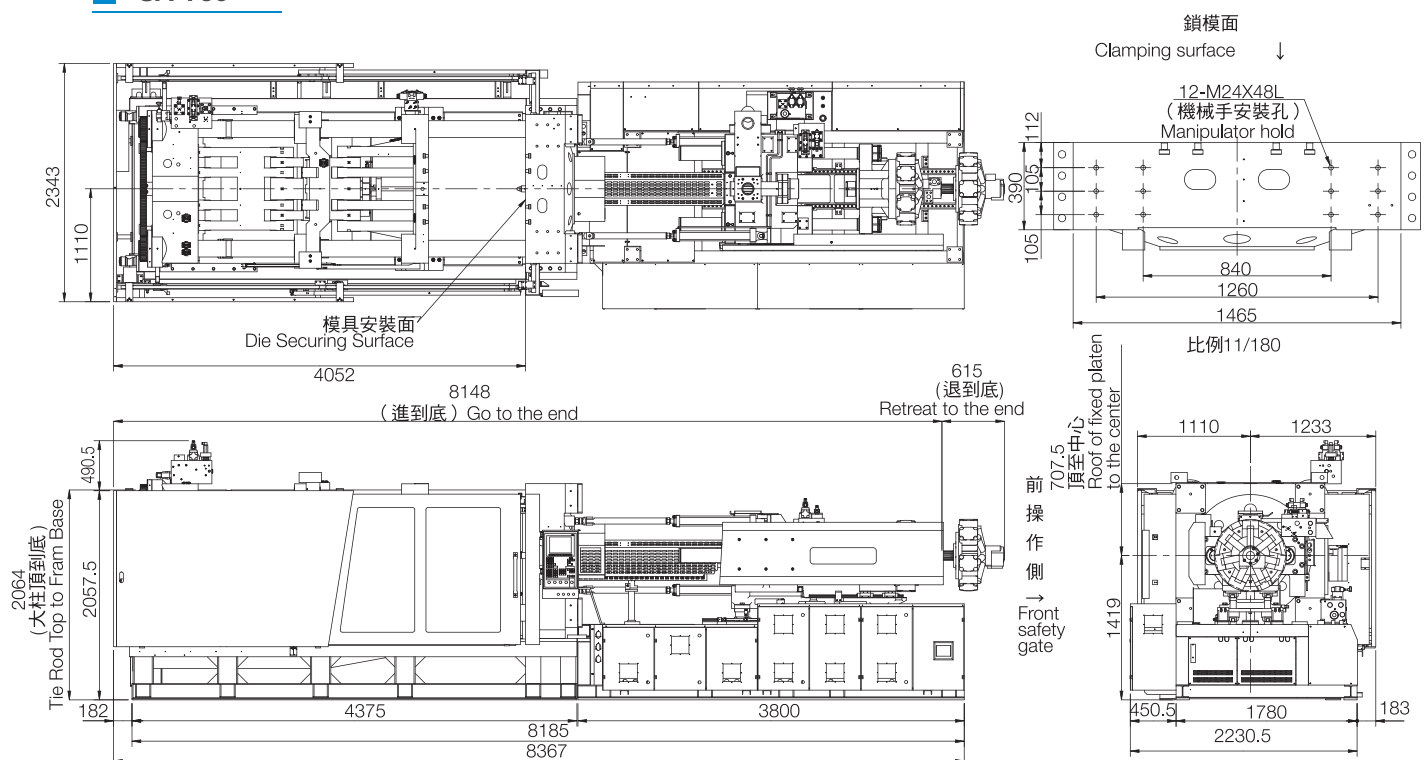

SA-850

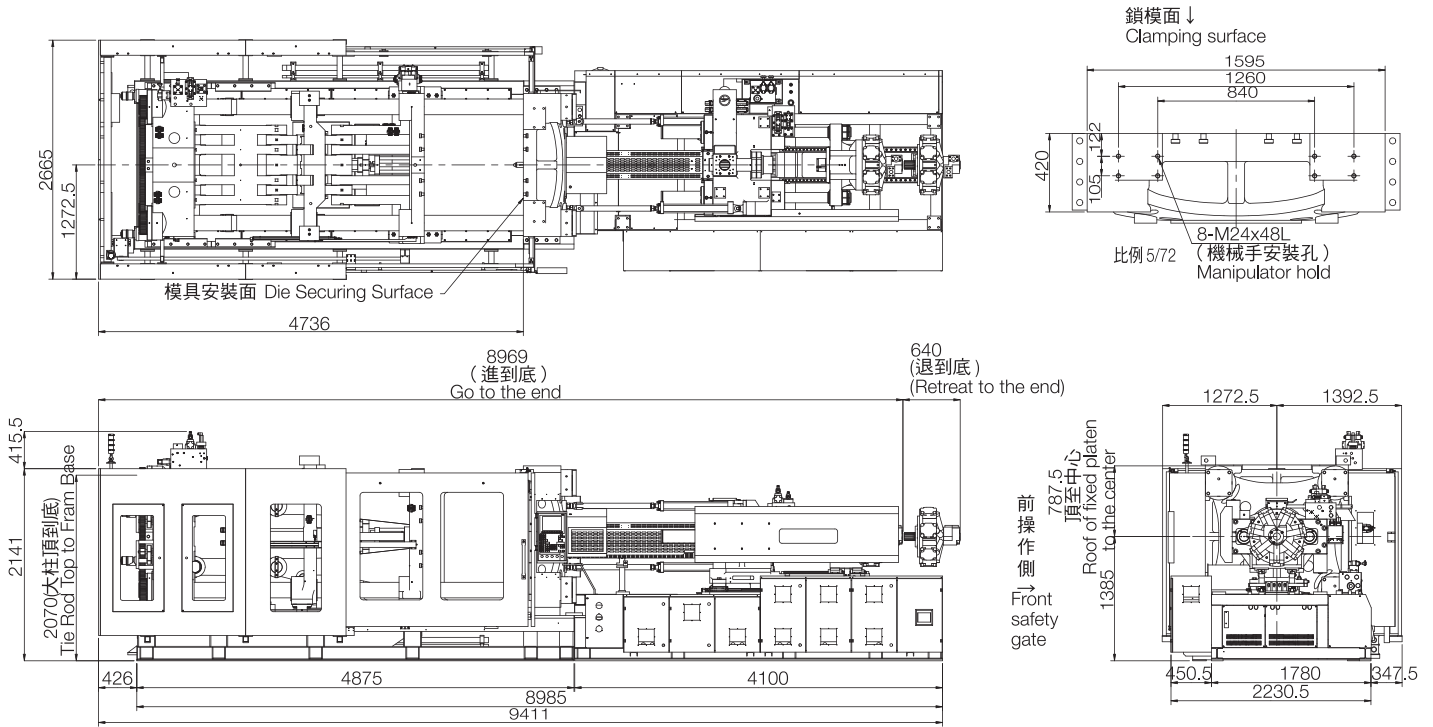


SA-1000

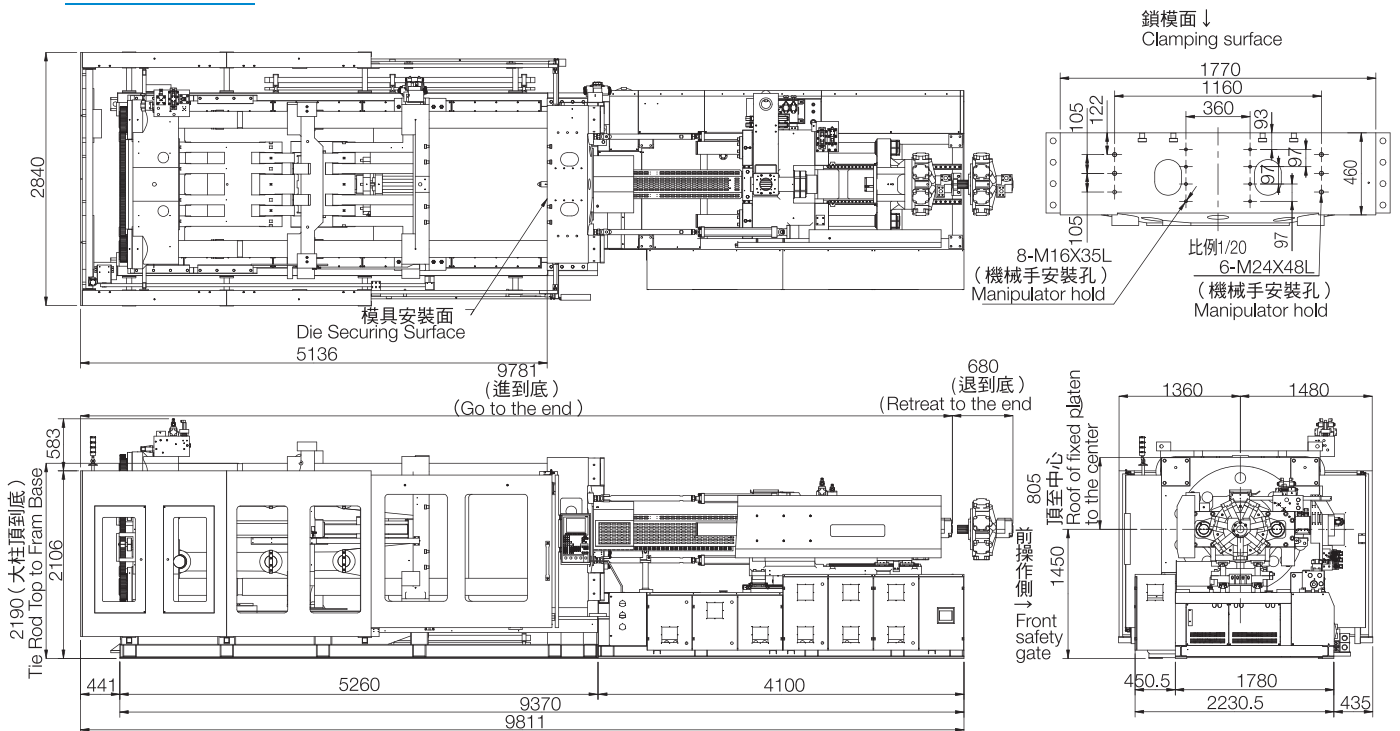


外觀尺寸圖 Machine Dimension



SA-1250

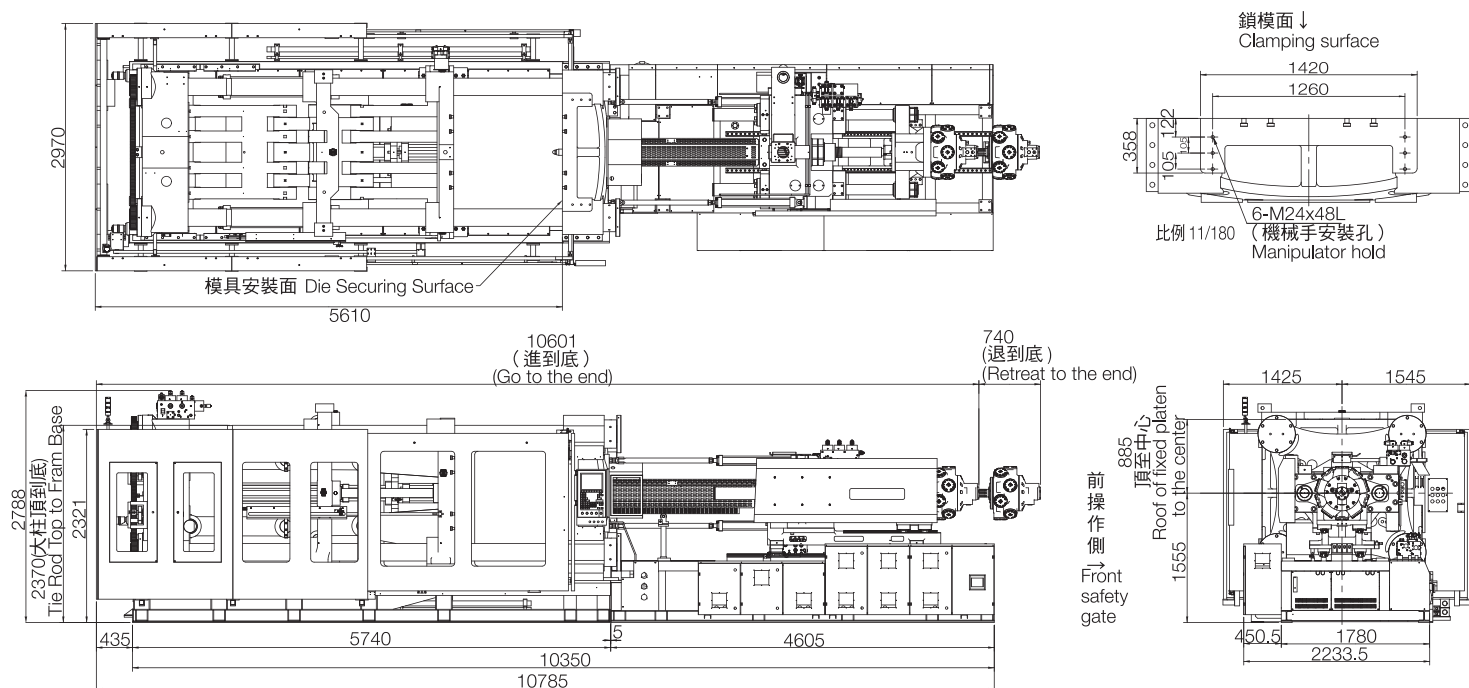

SA-1450

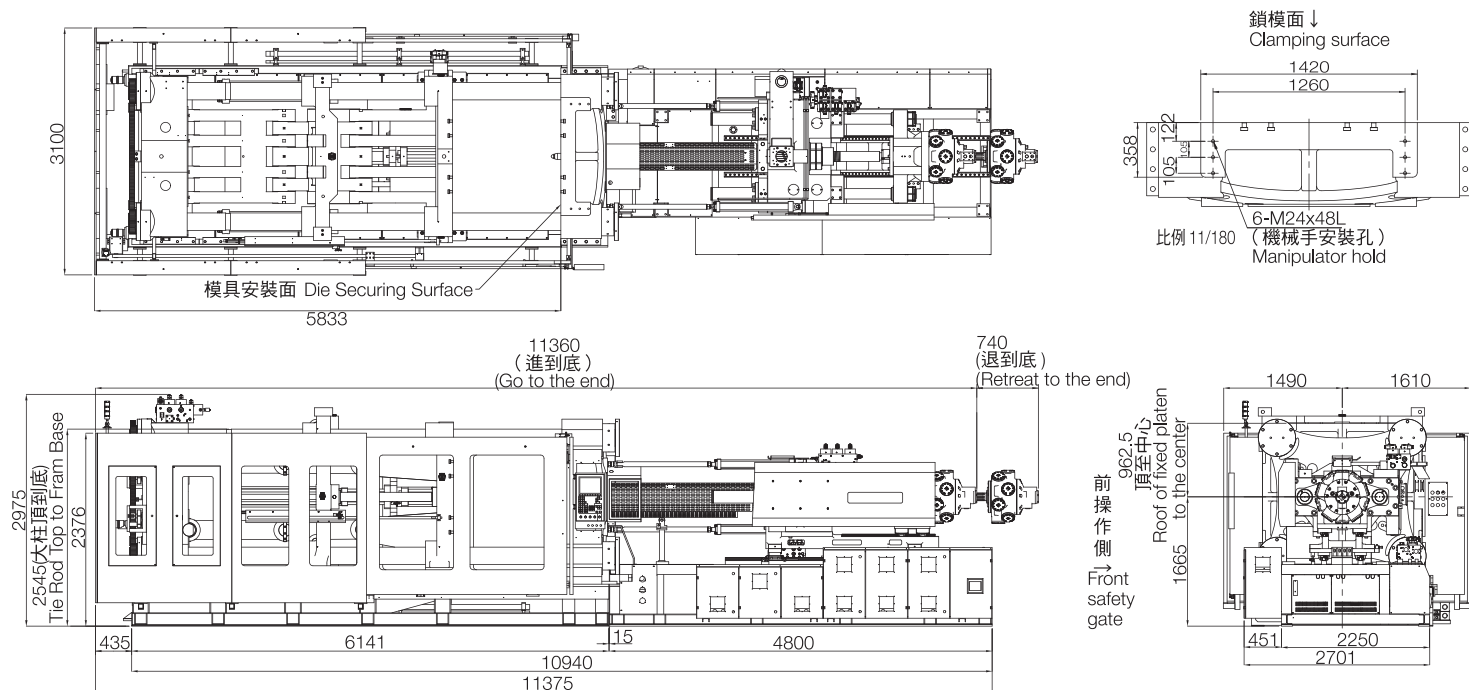


SA-1600

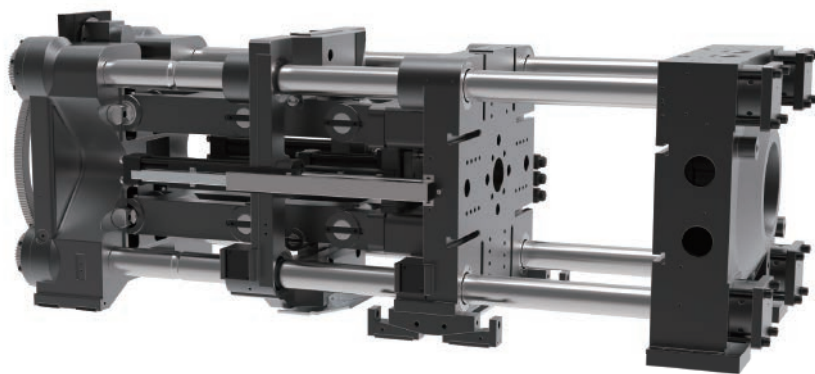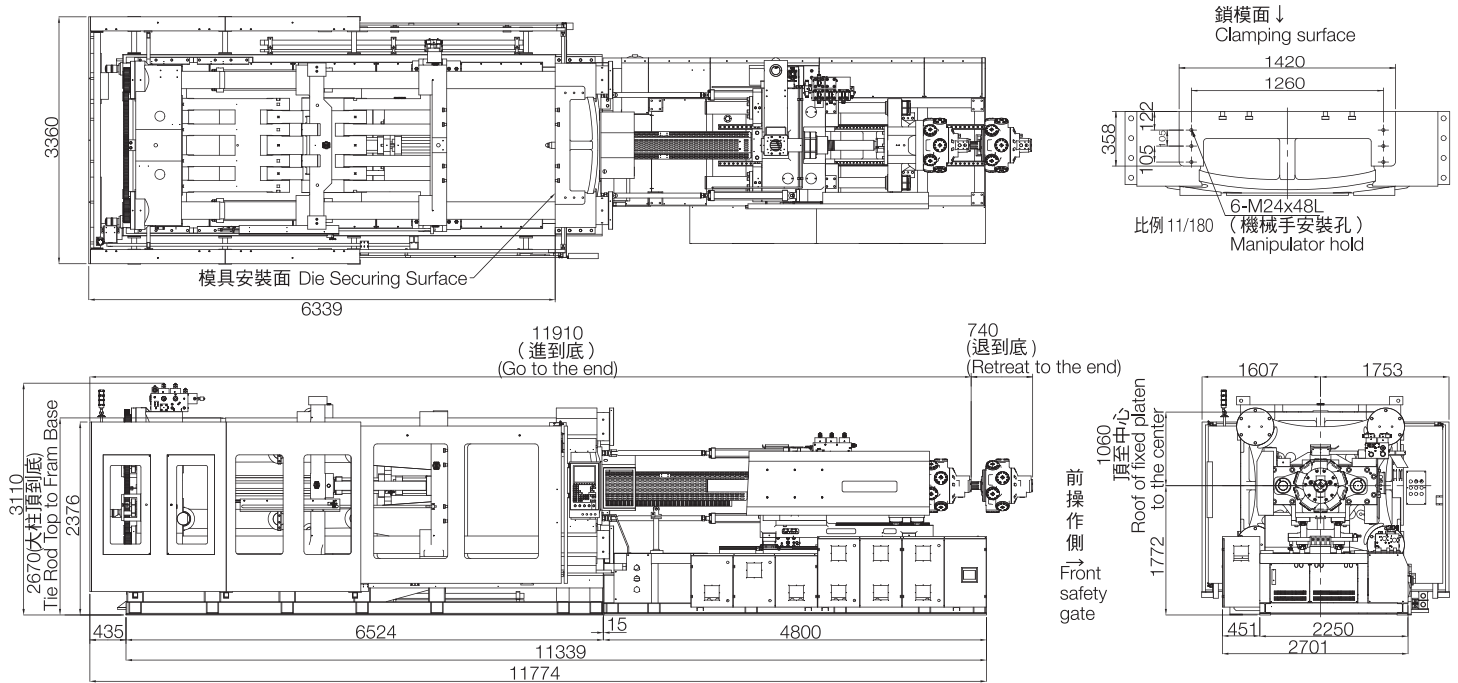

標準與選購配備 Standard & Optional Accessories

配備項目	ITEM	SA-100	SA-125	SA-160	SA-200	SA-250
射出止逆裝置	Shot-off Nozzle	○	○	○	○	○
PVC、PC、壓克力、尼龍專用螺桿組	Special Screw for PC/PMMA/PA/PVC...	○	○	○	○	○
雙合金螺桿、料管	Bi-alloy Screw/Barrel	○	○	○	○	○
托拉式落料裝置	Sliding material feeding device	●	●	●	●	●
曲手：套鋼	Steel bearing (Toggle)	●	●	●	●	●
模壁T型槽	T-slot platen	●	●	●	●	●
隔熱墊板	Insulator sheets	○	○	○	○	○
活動式模定位圈	Check ring of mold (Replaceable)	●	●	●	●	●
強制托退	Ejector pull back	○	○	○	○	○
射出安全護罩	Safety cover for injection	●	●	●	●	●
全罩式鈹金(射出)	Whole machine housing (Injection)	●	●	●	●	●
半罩式鈹金(射出)	Half machine housing (Injection)	—	—	—	—	—
成品落下口	Article Collecting Channel	●	●	●	●	●
成品落下板	Article Collecting Plate	▲	▲	▲	▲	▲
電眼檢出	Photo cell drop-out checking device	○	○	○	○	○
水流分佈器4入4出(銅製)	Water manifold - 4 in & 4 out (copper)	●	●	●	●	●
水流分佈器8入8出(銅製)	Water manifold - 8 in & 8 out (copper)	○	○	○	○	○
水流分佈器10入10出(銅製)	Water manifold - 10 in & 10 out (copper)	○	○	○	○	○
水流分佈器20入20出(銅製)	Water manifold - 20 in & 20 out (copper)	—	—	—	—	—
車壁潤滑：電動注油器	Auto Manual lubrication (platen)	●	●	●	●	●
曲手電動注油器	Auto lubrication system for toggle	●	●	●	●	●
開關模比例閥控制	Proportional valve for mould open and close	○	○	○	○	○
射出閉迴路(伺服閥)	Closed-loop control for injection (servo valve)	○	○	○	○	○
托模止逆閥	Non-return valve for ejector	●	●	●	●	●
單中子(一公)	Single core pulling device	●	●	●	●	●
雙中子(一公一母)	Double core pulling device	○	○	○	○	○
四中子(二公二母)	Four core pulling device	○	○	○	○	○
轉牙裝置(計時/計次)	Unscrew device by timer or counter	○	○	○	○	○
自封式磁性吸油過濾器	With check valve magnetic suction filter	●	●	●	●	●
雙迴路(開模與托模同動)	Double loops system (mold open - ejector start)	○	○	○	○	○
雙迴路(開模與加料同動)	Double loops system (mold open - screw charge start)	○	○	○	○	○
三迴路(開模、托模與加料同動)	Parallel movement for material charging & mold ejecting during mold opening	○	○	○	○	○
伺服節能系統	Servo power-saving system	●	●	●	●	●
電動安全門	Automatic safety gate (Electric type)	—	—	—	—	—
射出壓力螢幕顯示	Injection pressure display on screen	○	○	○	○	○
多段數位背壓(螢幕設定)	Multi-stage back pressure control(Screen set up)	●	●	●	●	●
數位背壓/射出壓力螢幕顯示	Multi-stage back pressure/Injection pressure display on Screen	○	○	○	○	○
油溫顯示	Oil temperature display for hydraulic system	●	●	●	●	●
油溫控制	Oil temperature control	○	○	○	○	○
落料口溫度顯示	Temperature display of material feeding section	●	●	●	●	●
落料口溫度控制	Temperature control of material feeding section	○	○	○	○	○
射嘴獨立溫控	Temperature control of injection nozzle	●	●	●	●	●
射出電阻尺	Linear potentiometer for injection	●	●	●	●	●
射座電阻尺	Linear potentiometer for injection carriage	○	○	○	○	○
夾模電阻尺	Linear potentiometer for clamping	●	●	●	●	●
托模電阻尺	Linear potentiometer for ejection	●	●	●	●	●
兩個風托(一公一母)	Air ejector sets	○	○	○	○	○
FCS-6510S微電腦控制器(彩色：KEBA)	FCS-6510S controller(color& key screen:KEBA)	●	●	●	●	●
FCS-6500S微電腦控制器(彩色：KEBA)	FCS-6500S controller(color& key screen:KEBA)	○	○	○	○	○
FCS-6500微電腦控制器(彩色觸控：KEBA)	FCS-6500 controller(color& touch screen:KEBA)	○	○	○	○	○
電控穩壓器	Power stabilizer for controller	○	○	○	○	○
資料保護鎖(硬體鎖)	Data lock function(key)	●	●	●	●	●
三色警示燈	Three-color alarm lamp	●	●	●	●	●
CE安全插座2組(380V/32A)	CE safty socket (380V/32A)	●	●	●	●	●
電源插座(110V/220V)	Power socket (110V/220V)	○	○	○	○	○
主電源斷路器	Main power breaker	●	●	●	●	●
24H料管自動定時預熱	24 hours auto-preheat for barrel sets	●	●	●	●	●
氣壓式閥澆口控制閥	Pneumatic type Valve Gate	○	○	○	○	○
機械手電氣接口(EU12/EU67)	Robot electrical interface	○	○	○	○	○
不銹鋼漏斗	Stainless hopper	○	○	○	○	○
乾燥機	Hopper dryer	○	○	○	○	○
抽料機	Auto loader	○	○	○	○	○
模溫機	Mold temperature controller	○	○	○	○	○
乾燥機磁鐵	Magnet of hopper dryer	○	○	○	○	○
門式吊桿	Frame hanger	○	○	○	○	○
吊桿組	Hanger set for lifting molds	○	○	○	○	—
避震器	Anti-vibration mounting pad	●	●	●	●	●
填料台	Filling material stand	—	—	—	—	—
工具箱組	Tool box	●	●	●	●	●
標準出車附件	Spare parts	●	●	●	●	●
外銷出車附件	Export accessories	▲	▲	▲	▲	▲

● 標準配備 Standard ○ 選購配備 Option ▲ 選附配備 Free Option — 無 N/A

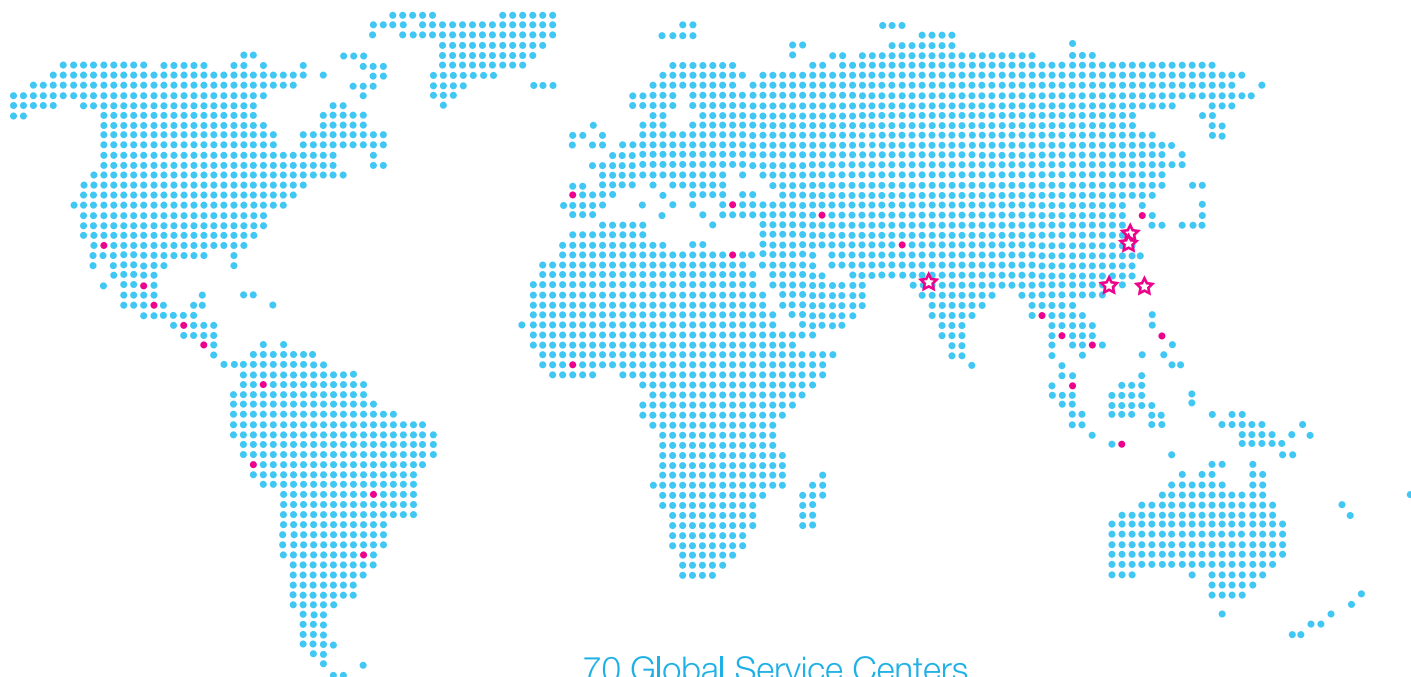

70 Global Service Centers

富強鑫集團 FCS Group

富強鑫精密工業股份有限公司

Fu Chun Shin Machinery Manufacture Co., Ltd.

71841 臺灣台南市關廟區埤頭里保東路269號
No.269, Baodong Road, Pitou Village, Guanmiao District, Tainan City 71841, Taiwan
TEL: +886-6-5950688 • FAX: +886-6-5951129 • E-mail: fcsco@fcs.com.tw

東莞富強鑫塑膠機械製造有限公司

Dongguan Fu Chun Shin Plastic Machinery Manufacture Co., Ltd.

廣東省東莞市大朗鎮石廈管理區金廈東路18號 郵編：523792
No.18, Jinxia East Road, Shixia Administration District, Dalang Town,
Dongguan City 523792, Guangdong Province, China
TEL: +86-769-83313753 • FAX: +86-769-83181903 • E-mail: cdg@fcs.com.tw

富強鑫(寧波)機器製造有限公司

Fu Chun Shin (Ningbo) Machinery Manufacture Co., Ltd.

浙江省寧波市江北區海川路115號 郵編：315032
No.115, Haichuan Road, Jiangbei District, Ningbo City 315032, Zhejiang Province, China
TEL: +86-574-56138688 • FAX: +86-574-56138600 • E-mail: cnb@fcs.com.tw

富強鑫(寧波)精密科技股份有限公司

Fu Chun Shin (Ningbo) Precision Technology Co., Ltd.

浙江省寧波杭州灣新區啟源路166號 郵編：315336
No.166 Qiyuan Road, Hangzhou Bay New District, Ningbo 315336, Zhejiang Province, China
TEL: +86-574-56138689 • FAX: +86-574-56138699 • E-mail: chz@fcs.com.tw

印度富強鑫

FCS Manufacturing (India) Private Limited

Block Number 218, Xcelon Industrial Estate, Near Intas Pharmaceutical, Village Chancharvadi Vasna,
Sarkhej Bavla Road, Taluka Sanand, Ahmedabad, Gujarat - 382213
TEL: +91-99-98897768 • E-mail: fcsindia@fcs.com.tw

FCS
www.fcs.com.tw

